


## Features

1. Offers reject, detection, and pass-through modes.
2. Modular buffer conveyor design.
3. Enhanced frame stability, multi-zone positioning accuracy, and ergonomic design.
4. Custom lengths available upon request.
5. Single- or dual-track configurations available upon request.
6. Adjustable conveyor speed.
7. SMEMA-compliant.



### Technical Parameters

<b>Description</b>	The equipment can separate NG/OK PCB boards, OK PCB can move on during inspection
<b>Belt type</b>	Antistatic oblate belt
<b>Conveying speed</b>	0.5-20M/min or customer specified
<b>Powersupply</b>	AC1P110V/220V
<b>Power</b>	Max 100VA
<b>Storage plate number</b>	8pcs(or specify)
<b>Storage plate distance</b>	20mm(or specify)
<b>Transport height</b>	900±20mm(Or customized)
<b>Transport direction</b>	From left to right or right to left

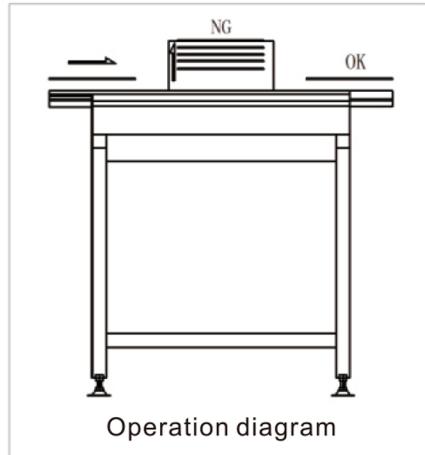

### Specifications

<b>Model</b>	RC-050XL-TN	RC-100XL-TN
<b>Dimension (L*W*H MM)</b>	500*793*900	1000*793*900
<b>PCB size(MM)</b>	50*50-460*460	50*50-530*460
<b>Weight(KG)</b>	70	105